









### Individual Components

#### Order Specifications

- Upper track
- Type of lower guide or guide channel
- Door width
- Glass thickness
- Door weight
- Number of running gears (2 per door)
- Number of suspension plates (2 per door)
- Number of track stoppers (2 per door)


	Description	Material	Finish/Color	Length	Item No.
	Upper track, side-drilled	Steel	stainless	6 m (19' 8 1/4")	942.42.601
	Upper track, with mounting flanges	Steel	stainless	6 m (19' 8 1/4")	942.43.601
	Lower guide channel, pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Connecting pin, notched	Steel	galvanized	-	946.12.090
	Lower guide, with plastic slider and suspension block	-	-	-	946.12.060
	Lower guide, rattle-free, for 8, 10, 12 and 12.7 (5/16", 3/8", 15/32" and 1/2") thick glass	-	-	-	940.40.032
	Lower guide, floor-mounted, (cannot be used in conjunction with deadbolt lock)	Plastic	-	-	940.84.032
	Glass suspension profile 'G', 10 - 18 (3/8" - 11/16")	Aluminum	unanodized	6.5 m (21' 3 15/16")	942.44.023
	Running gear	Wheels: Steel	-	-	942.44.012
	Suspension plate, with suspension bolt M12	-	-	-	942.44.020
	Track stopper, to be drilled into upper track	Steel	galvanized	-	942.42.041
	Buffer, screw-on type	Rubber	black	-	941.60.051
	Cover cap, for glass suspension profile	Rubber	gray	-	940.80.029
	Glass holder insert, with M6 x 30 (1 3/16") screw	Plastic	-	-	940.84.024

#### Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Locks	Page 1.294-1.295
Glass edge protection seals	Page 1.298
Finishes	Page 1.296

#### Glass Cutouts

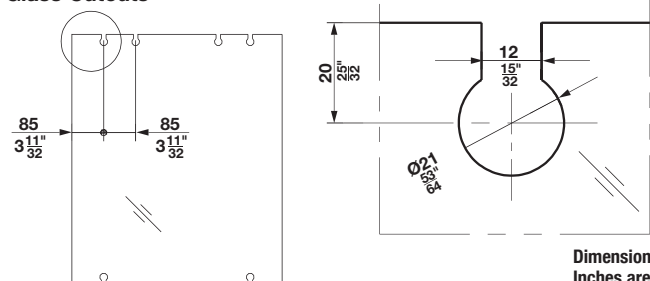

Dimensions in mm  
Inches are approximate

Dimensional data not binding. We reserve the right to alter specifications without notice.