

Battery Powered Electronic Locking Systems
Dialock® Info Terminal – RFID

Features

- Transmitter and receiver module for data exchange with electronic keys
- 2 function buttons, LCD (4 lines, 16 characters each) for menu-driven data input/communication in maintenance mode
- Infrared interface for communication with handheld programming devices.

Simple Programming

- Unique code of key is learned by the Dialock® Terminal
- A green programming key is presented, followed by user keys to be learned
 - A red programming key is presented, followed by a user key to be deleted
 - All learned keys can be deleted

Complete Programming

- Windows based modules for Personnel, Hotel and Clinic applications.
- Dialock® programming software and hardware not included in this catalog, contact the Dialock® dept. for details

Wellness Function


- Wellness + Simple
- Wellness + Personnel
Wellness function allows a user to lock any available open LockerLock
- A user key may lock only one unit
- When the user unlocks the LockerLock, the unit is available for any user and the user key is “unblocked” and usable at any open LockerLock
- If Wellness is used for “day use” management of the locks, emergency keys are programmed using either Simple or Complete programming

Areas of Application

- Required only for the Wellness function of LockerLock
- Utilizes Tag-it™ technology

Functions

- Reading the number of the locker for which the electronic key is authorized
- Data input in maintenance mode via display and function keys
- Unblocking keys if an emergency key was used to open a LockerLock
- Language selection: English, Spanish, French, German, Italian

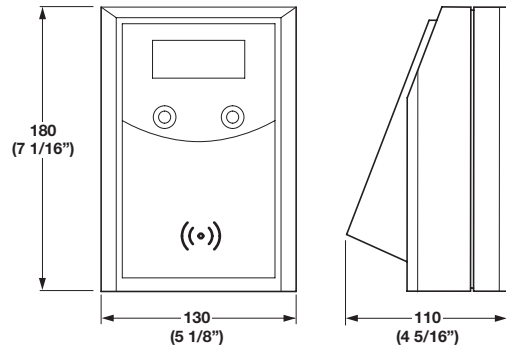

Technical Data

Power Supply	
Direct voltage	10–12V/DC
Alternating voltage	8–9 V
Continuous current input	200mA
Peak current input	400mA
Safety class	IP65
Temperature range	0°C–60°C (32°F–140°F)
Relative humidity	0–95% non-condensing

Tag-It™

Material: Plastic

Color	Item No.
white	917.42.071

Supplied With

- Cover gasket
- 4 rubber bumpers
- Wall mounting plate
- Screws

Power Supply

- Voltage: 9 V/DC
- Current: 800 mA
- Temp: 0 to 60° C (32° to 140° F)

Material: Plastic

Color	Item No.
black	825.56.018



10

Dimensions in mm
Inches are approximate