

Furniture Lock Controllers

FT 120




- Up to 228 keys can be authorized at a single terminal
- Indication of lock state through LEDs (red/green) and audible beep
- Configurable locking state
- Cycle Operation: Can be configured for 1 – 25 seconds with optional configuration key card (Pre-set default time: 3 seconds)
- Toggle Operation: Present key to open, re-present key to lock

Area of Application

- For use with Dialock® Simple Programming (level 1 or complete programming level 2)
- For use with Dialock® Tag-it™ Transponders only
- Suitable for interior use

Features

- If an authorized electronic key is presented to the unit, all locks are activated simultaneously
- Optional Output Extender: If an authorized electronic key is presented to the unit, independent control of up to 8 electric locks is possible
- Optional LED interface: (customer supplied)

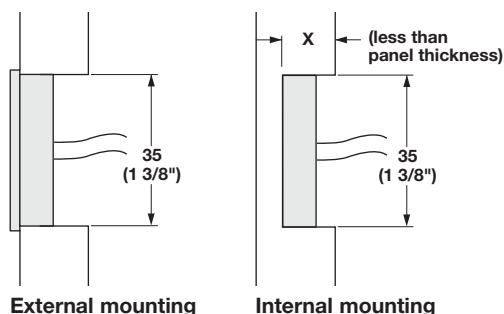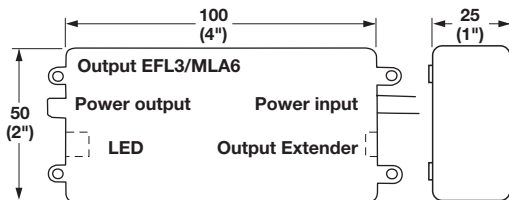

Dimensions in mm
Inches are approximate

Technical Data

Voltage Supply	12-17VDC 11-14VAC
Continuous Current	75mA
Output Extender	50mA each
Switching Voltage Rating	14V
Peak Current	750mA
Temperature Range (Inside only)	0 to +60° C (+32 to +140° F)

FT 120 Tag-it™ Control Module

- Without antenna (sold separately below)

Material: Plastic

Color	Item No.
gray	237.58.111

Supplied With

Mounting tabs
1 meter (39") secondary extension cord

Note

FT 120, formerly known as DFT.

Antenna

Material: Plastic; Color: dark gray

Cable Length	Item No.
3 m (118")	237.58.129
1 m (39 3/8")	237.58.130

Configuration Key Card

- Open time

Item No.
917.42.00X.74

Note

Also use 823.28.390 and 910.51.090 for extender relay and output extender option.

823.28.390	Page 10.94
951.51.090	Page 10.94
Keys	Pages 10.98–10.99