



- For lightweight panels with a surface layer of 4 mm or greater
- Suitable for lightweight panels without frame
- For wood thickness: 32 to 50 mm (1 1/4" - 1 15/16")

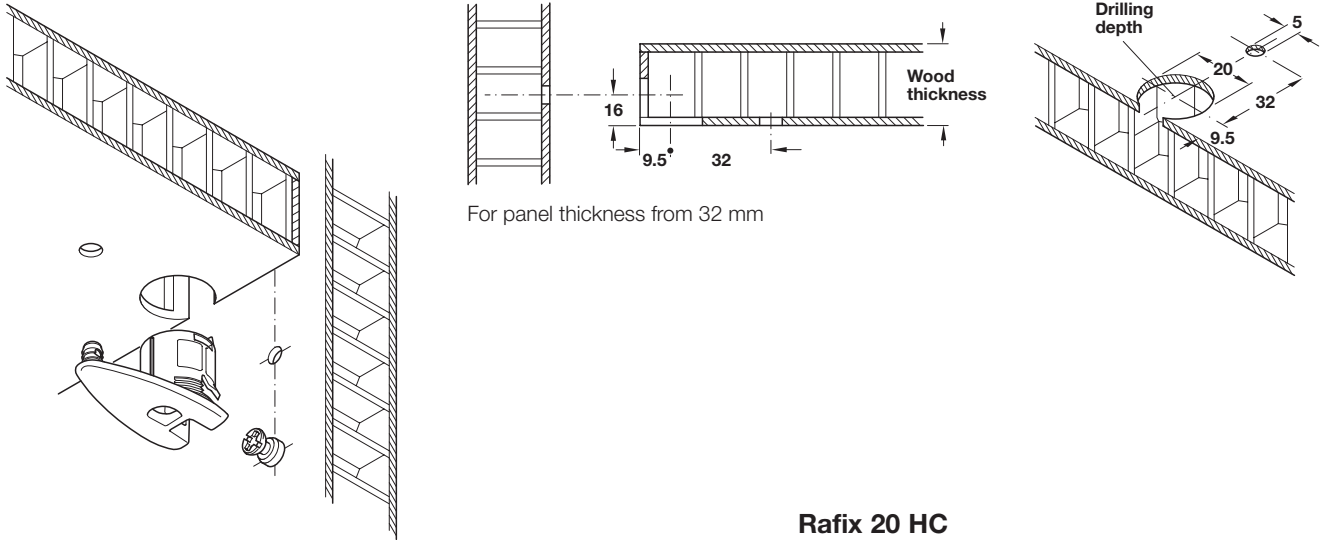

Rafx 20 HC

- For panel thickness 32-50 mm
- Drill hole Ø: Cup insert 20 mm; dowel 5 mm
- Drill depth: 22.5 mm
- PZ2 cross slot

Material: Cup insert: Plastic; Tightening element: Zinc alloy


Finish/Color	Item No.
brown	263.18.102
white	263.18.702
black	263.18.302
nickel lacquered	263.18.602

M20 Connecting Bolt

- For Ø5 mm drill hole
- PZ2 cross slot

Material: Zinc alloy


Finish	Item No.
galvanized	263.20.131



Connecting Bolt

Material: Steel; Finish: zinc-plated


For panel thickness	Item No.
9	263.20.818
11	263.20.810

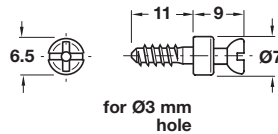

Connecting Bolt

Material: Steel; Finish: zinc-plated

Drive Type	Item No.
#2 phillips	263.20.985
pozi	263.20.981

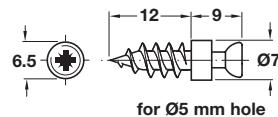

Dimensional data not binding. We reserve the right to alter specifications without notice.