
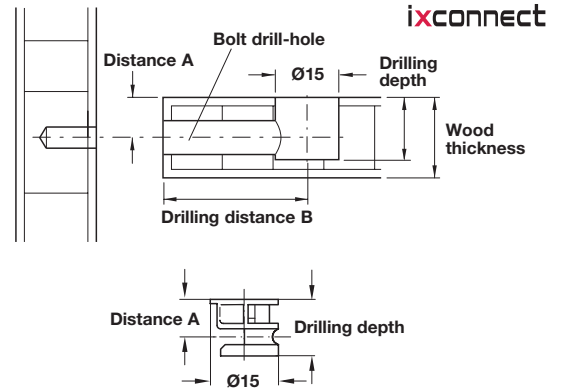


Note

All the connecting bolts shown on pages 11.31-11.32 can be used with these zinc die-cast cams.

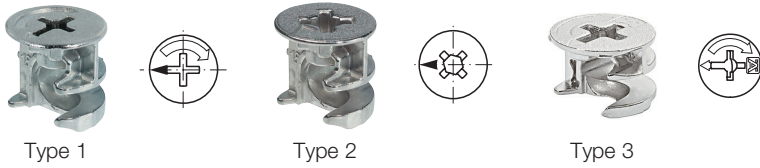

Minifix® 15 Cam

- Without flanged rim


Material: Zinc die-cast

Wood thickness from:	Distance A Center locking position	Type	Drilling depth	Unfinished	Nickel-plated	Black	Tightening Tools					
							Pozi #2	Pozi #3	Phillips #2	Hex Key #4	Tightening Key	
12	6.0	1	9.5+0.2	262.26.070	262.26.570	-	•					•
13	6.5	1	11.0+0.2	262.26.071	262.26.571	262.26.371	•	•	•	•	•	•
16	8.0	3	12.5+0.5	262.26.093	262.26.593	262.26.393	•		•	•	•	•
19	9.5	1	14.0+0.5	262.26.075	262.26.575	262.26.375	•		•	•	•	•
23	11.5	2	16.5+0.5	262.26.264	-	262.26.862	•	•	•	•	•	•
29	14.5	2	19.5+0.5	262.26.291	262.26.693	262.26.899	•	•	•	•	•	•

Trim Cap

- For Minifix® cams without flanged rims.

Material: Zinc die-cast

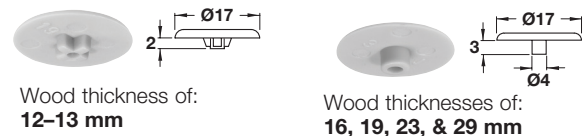


Wood thickness from:	White	Pine	Brown	Gray	Black
12 - 13	262.24.760	-	262.24.162	-	-
16, 19, 23, & 29	262.24.751	262.24.055	262.24.153	262.24.525	262.24.359


Minifix® 15 Cam

- With flanged rim

Material: Zinc die-cast

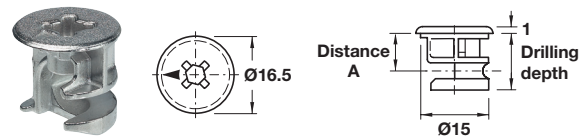

Wood thickness from:	Distance A Center locking position	Drilling depth	Unfinished	Nickel-plated	Black	Tightening Tools				
						Pozi #2	Pozi #2	Phillips #2	Hex Key #4	Tightening Key
16	8.0	12.5+0.5	262.25.212	262.25.614	262.25.810	•	•	•	•	•
19	9.5	14.5+0.5	262.25.221	262.25.623	262.25.829	•	•	•	•	•

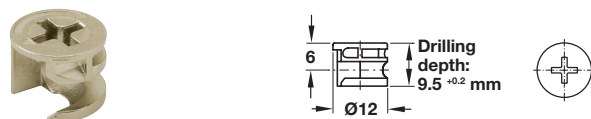

Minifix® 12 Cam

- Can be locked only with a cross-slot screwdriver size 2
- Without flanged rim
- Wood thickness from: 12 mm

Material: Zinc, die-cast

Finish	Item No.
unfinished	262.17.020
nickel-plated	262.17.620

Dimensional data not binding. We reserve the right to alter specifications without notice.