

Connecting Bolt/turned


- Thread length 8 mm

Material: Steel, galvanized

Drilling distance B	Item No.
24	262.27.920
34	262.28.920

Note

Suitable for double-sided installation in minimum board thickness of 19 mm




Econo S Bolt/cold-formed

- Drive: Pozi 2 or Phillips 2
- Polystyrene sleeve prevents sagging and allows bolt to revolve freely during installation

Material: Steel, galvanized


Drilling distance B	Unfinished	Zinc-plated
24	262.27.670	262.27.679
34	262.28.670	262.28.679



- Thread length 15 mm

Material: Steel, galvanized

Drilling distance	Item No.
24	262.27.832
34	262.28.839




Connecting Bolt/cold-formed

- Drilling distance: 34 mm
- Thread length 11 mm standard
- Drive: Pozi 2 or Phillips 2

Material: Steel, galvanized


Drilling distance B	Item No.
24	262.27.627
34	262.28.624



- Thread length 11 mm standard

Material: Steel

Finish	Drilling distance	Item No.
unfinished	24	262.27.029
unfinished	34	262.28.026
galvanized	24	262.27.921
galvanized	34	262.28.928

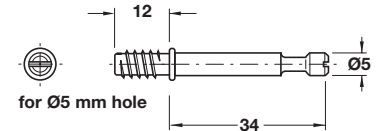


Connecting Bolt

- Drilling distance: 34 mm

Material: Steel, unfinished

Item No.
262.28.188




End Screw

- With M4 thread
- Can be used as end bolt

Material: Steel

Length	Nickel-plated	Bronzed
8	020.92.711	-
10	020.92.720	020.92.122

Packing: 2000 pcs.

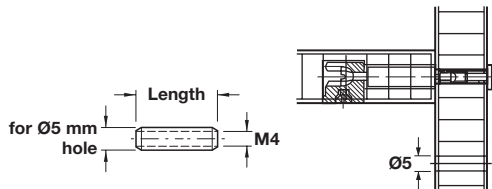

Sleeve, smooth

- With M4 internal thread
- Suitable for double-sided installations

Material: Steel, galvanized

Length	Item No.
15	267.00.911
18	267.00.912
22	267.00.913

Dimensions in mm
Inches are approximate