

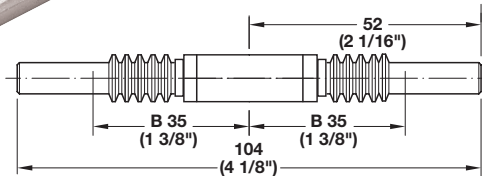

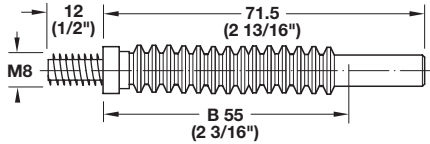



Confa 35

- For very sturdy and heavily loaded joints
- Long travel distance
- Quickly tightened
- Can be tightened with 6 mm hex key
- Even a cordless drill can be used for quick assembly



The above connecting bolts can be used with the following parts.




Hex Key, 6 mm

Material: Steel

Finish	Item No.
zinc-plated	008.28.268

ixconnect

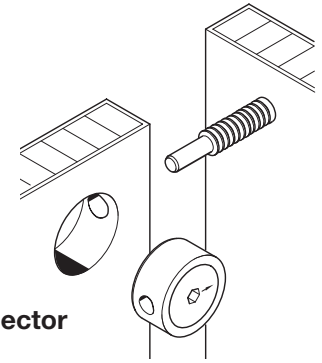

Recessed Universal Connector

Material: Housing: Zinc die-cast
Tightening element: Steel, unfinished

Wood thickness from:	Dimension A mounting center	Drilling depth	Item No.
24	1/2 wood thickness	1/2 wood thickness + 8	262.69.009

Trim Cap

- Cam needs to be recessed 3 mm to accept cover cap

Material: Plastic

Color	Item No.
brown	262.69.198
black	262.69.398

Connecting Bolt

- With M8 thread

Material: Steel; Finish: zinc-plated

B = drilling Ø	Item No.
35	262.69.036
55	262.69.045

Double-ended Bolt

- 3 part assembly
- B = drilling Ø35 mm

Material: Steel


Finish	Item No.
zinc-plated	262.69.950

M8 Screw Socket

- With screw slot

Material: Steel, unfinished

Outer Ø	Inner Ø	Length	Item No.
14	11.5	15	030.00.404
16	12	18	030.00.422



Dimensional data not binding. We reserve the right to alter specifications without notice.