
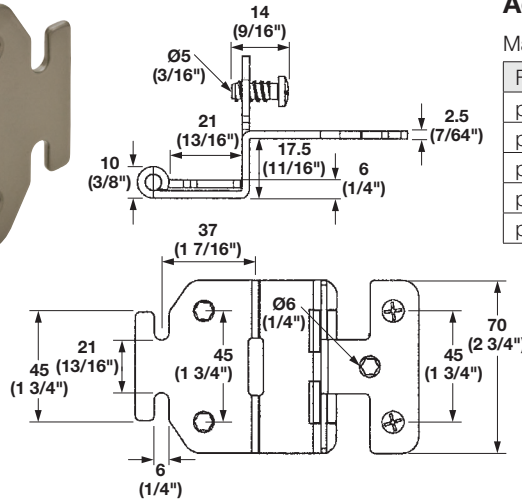


Five-Knuckle Hinge – Grade 1

- ANSI/BHMA A-156.9-2001 Grade 1 approved
- Universal usage on 3/4" & 13/16" materials
- 14 gauge steel
- Hinge knuckles broached for precision pin alignment and smooth operation
- Hinge leaves punched after forming for precision alignment
- "Easy Hang" feature - requires one person operation for hanging large doors
- Pre-mounted 5 mm Euro Screws
- Universal drill pattern consistent with Aximat® and concealed hinges
- Standard drilling equipment can be used
- Standard 37 mm set back and 32 mm system drilling

Opening angle: **270°**

Offset hole pattern allows for larger mounting screws




Advantage 5 K

Material: Steel, powder-coated or plated




Finish	Item No.
powder-coated matt black	354.65.300
powder-coated dull chrome	354.65.200
powder-coated pearl	354.65.700
plated brushed nickel	354.65.410
powder-coated matt nickel	354.65.400

Press-fit Drilling diagram

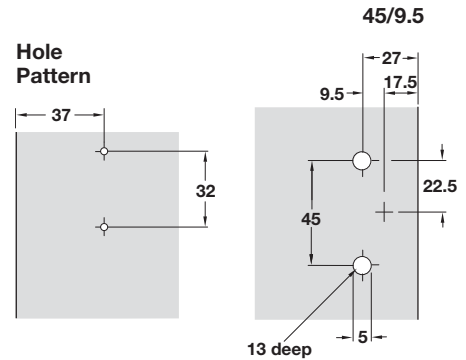

9

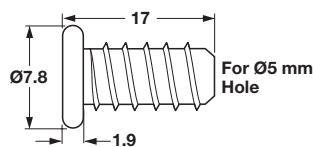

Stainless Steel Advantage 5 K

Material: 304 Stainless Steel

Item No.
354.65.000

Supplied With
Screws

Special Varianta Screw

Material: Steel

Finish	Item No.
nickel-plated	013.27.702

Packing: 5000 pcs.

Flat head screws	pages 11.137-11.138, 11.140
Pan head screws	pages 11.139-11.140

Dimensions in mm
Inches are approximate