


SENSO


- Soft and Silent closing
- Minimum cabinet depth 138 mm (5 7/16")
- Easy installation using the 32 mm system – only 4 screws to attach the fitting to each side of the cabinet
- No tools required to connect the door and the fitting
- For wood and aluminum framed doors
- Safety feature – Middle hinges unsnap to prevent injury to jammed fingers without damaging hinge or door
- Door stays open at the position at which it is released
- Can be used with a wide range of door sizes
- Top and bottom door must be equal height
- Gap between top and bottom door should be 2 mm (2–4 mm if using the adjustable middle door hinge)
- Strength of fitting is adjustable to perfectly counterbalance the weight of your door
- 3D door adjustment: +/- 3 mm vertical & horizontal adjustment
- Opening angle is adjustable from 110° – 125° using the adjustable end stop

Note

Concealed hinges and plates are required for installation and must be ordered separately.

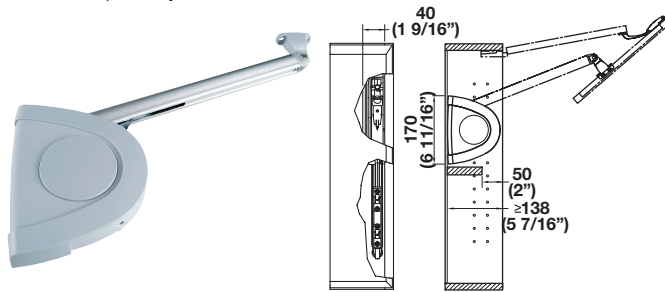

Door Bracket

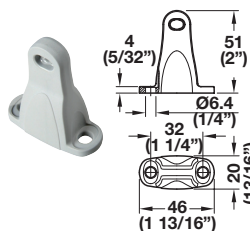


- With round mounting hole
- For wood or wide profile (35 mm or wider) aluminum doors

Material: Plastic

Color	Item No.
silver Ral 9006	372.64.990

Door Bracket

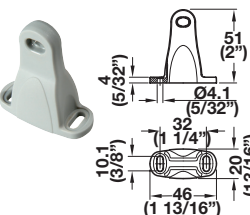


- With oblong mounting hole
- For wood or wide profile (35 mm or wider) aluminum doors

Material: Plastic

Color	Item No.
silver Ral 9006	372.64.991



Middle Door Hinge

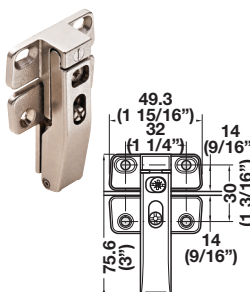

- With safety feature
- Two required per door, for doors over 900 mm (35 7/16") three are required
- Adjustable hinge offers in/out, horizontal, and vertical adjustment

Material: Zinc

Finish	Item No.
nickel-plated	372.64.796

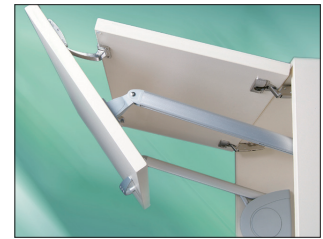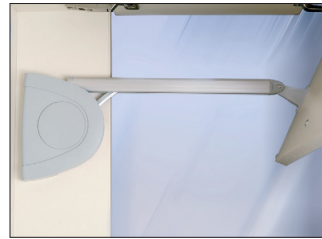

soft&silent

Lift-up Fitting

Material: Arms & Rod: Steel; Finish: matt chrome
Brackets & Cover caps: Plastic
Color: silver Ral 9006




Door height	Door weight	Item No.
	6.6 – 14.3 lbs.	372.64.901
540 – 580 (21 1/4" – 22 13/16")	13.2 – 26.4 lbs.	372.64.902
	19.8 – 39.6 lbs.	372.64.903
	26.4 – 53.9 lbs.	372.64.904
580 – 640 (22 13/16" – 25 3/16")	6.6 – 13.2 lbs.	372.64.911
	13.2 – 24.2 lbs.	372.64.912
	19.8 – 37.4 lbs.	372.64.913
	26.4 – 50.6 lbs.	372.64.914
640 – 700 (25 3/16" – 27 9/16")	6.6 – 12.1 lbs.	372.64.921
	12.1 – 22 lbs.	372.64.922
	17.6 – 35.2 lbs.	372.64.923
	23.1 – 47.3 lbs.	372.64.924
700 – 780 (27 9/16" – 30 11/16")	7.7 – 12.1 lbs.	372.64.931
	11 – 19.8 lbs.	372.64.932
	15.4 – 22 lbs.	372.64.933
	19.8 – 44 lbs.	372.64.934
780 – 840 (30 11/16" – 33 1/16")	11 – 19.8 lbs.	372.64.942
	15.4 – 28.6 lbs.	372.64.943
	19.8 – 37.4 lbs.	372.64.944
840 – 900 (33 7/16" – 35 7/16")	12.1 – 26.4 lbs.	372.64.953
	16.5 – 35.2 lbs.	372.64.954

Supplied With

Left and right handed arm
2 standard door brackets
2 cover caps
Mounting instructions

Note

Must order stabilizer rod separately

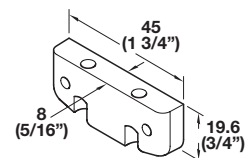

Adapter

- For narrow profile aluminum doors (less than 35 mm wide)
- For use with 372.64.991 door bracket

Material: Zinc

Finish	Item No.
matt chrome	372.64.995

Note

Adapter must be ordered in addition to a door bracket if using a narrow profile aluminum door.