


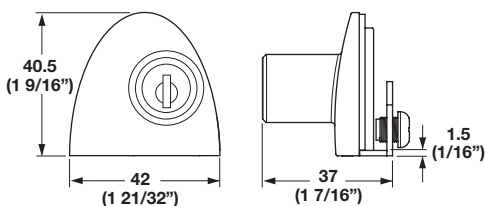


Badge for Lightweight Glass Doors

- Non-Bore Hinge and Lock for Lightweight Glass Doors

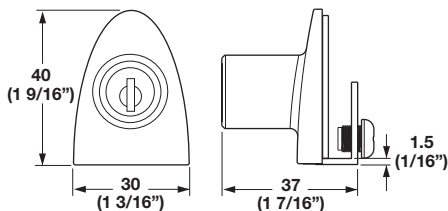

Single Door Lock

- Screw-mounted
- Available in keyed-different or keyed-alike option
- 400 key changes
- Edge mounts to glass door with two ABS plastic screws
- Closure travel: 180°
- For glass thicknesses 4 – 5 mm

Material: Zinc, die-cast; Finish: aluminum

Keying	Item No.
different	233.54.900
alike #D20	233.54.901

Supplied With

- 2 keys
- 2 ABS plastic screws
- Strike plate



Double Door Lock

Material: Zinc, die-cast; Finish: aluminum

Keying	Item No.
different	233.54.910
alike #D20	233.54.911

Supplied With

- 2 keys
- 2 ABS plastic screws
- Strike plate



Edge Strike Plate

- Press-fit mounted
- Glass door must be flush with edge of cabinet
- Edge mounts to cabinet
- Boring required for press-fit pins: Ø 5 mm x 9 mm

Material: Zinc, die-cast; Finish: aluminum

Version	Item No.
single door	233.54.990
double door	233.54.991



Door Strike Plate

- Screw-mounted
- Must be used with the single door lock only in double door applications
- Edge mounts to glass door with two ABS plastic screws
- For glass thicknesses 4 – 5 mm

Material: Zinc, die-cast

Finish	Item No.
aluminum	233.54.992

Supplied With

- 2 ABS plastic screws

Dimensions in mm
Inches are approximate

Dimensional data not binding. We reserve the right to alter specifications without notice.