


**Salice**



**Thin Door Hinges**


- For doors with deep profiles
- Shallow cup depth 8 mm
- Door thickness 10 to 20 mm (3/8" – 13/16")
- Tab: 3 – 6 mm



Material: Cup: Steel; Hinge arm: Steel; Finish: nickel-plated

Opening Angle	Closing Method	Mounting	Overlay	Hinge Arm	Model	Item No.
105°	Self-close	Screw	Full		C1P6A99	329.28.500
105°	Self-close	Screw	Half		C1P6G99	329.28.502


Full overlay mounting with mounting plate.

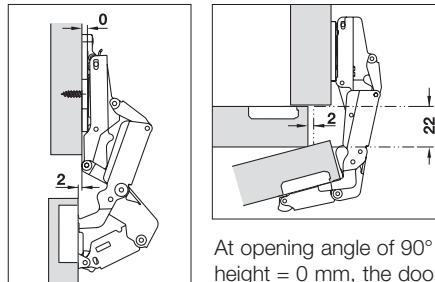

At opening angle of 90° and mounting plate height = 0 mm, the door swings out laterally 2 mm when opened.

**With Zero Protrusion**

- For cabinets with pull-out shelves
- Door thickness 10 to 22 mm (3/8" – 7/8")
- Tab: 3 – 8 mm
- Zero protrusion with 155° hinge and maximum 2 mm mounting plate

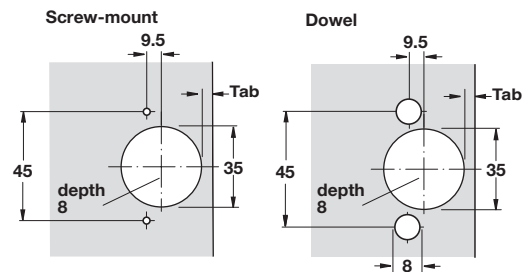

Material: Cup: Zinc, die-cast; Hinge arm: Steel; Finish: nickel-plated

Opening Angle	Closing Method	Mounting	Overlay	Hinge Arm	Model	Item No.
155°	Self-close	Screw	Full		C2PMA99	329.27.500
155°	Self-close	Dowel	Half		C2RMA99	329.27.510



**Trim Caps**

- For hinge arm

Material: Plastic

Color	Model	Item No.
white	S2XX83A1	329.18.700
black	S2XX83A3	329.18.308

Dimensional data not binding. We reserve the right to alter specifications without notice.

Mounting plates	pages 9.35–9.40
Raised head screws	page 11.145

Dimensions in mm  
Inches are approximate