




### Aximat®

- For free-swinging or guided folding doors
- Minimum door thickness of 13 mm (1/2")
- Same drilling pattern for both leaves
- Gap range is adjustable from 0 – 10 mm (3/8")
- Factory supplied with pre-set 3 mm (1/8") gap
- Adjustable pivot point
- Constant spring tension is maintained during all adjustments




Opening angle: **180°**

### For Folding Doors


Material: Zinc

Finish	Item No.
nickel	343.91.600

To hold the door leaves flat, install a support.

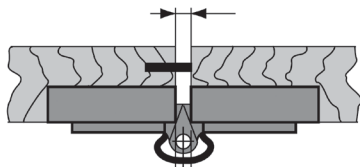

Symmetrical and/or asymmetrical adjustment of the door leaves

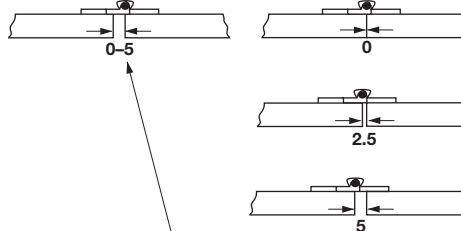

Height adjustment

