

Battery Powered Electronic Locking Systems
Dialock® LockerLock – RFID

Programming Options



- Simple Programming features – default setting
- Wellness Function – user selects any one open cabinet or locker

Complete Programming


- Windows based modules for Personnel, Hotel and Clinic applications.

Note


Dialock® programming software and hardware not included in this catalog, contact the Dialock® dept. for details

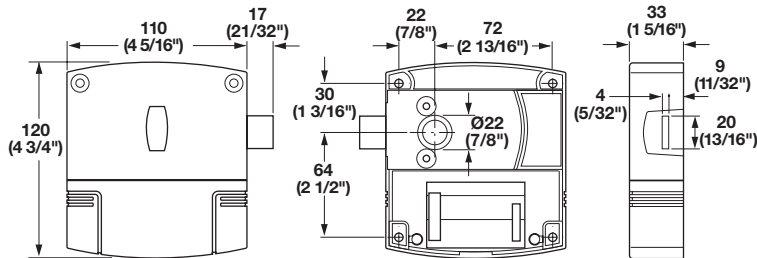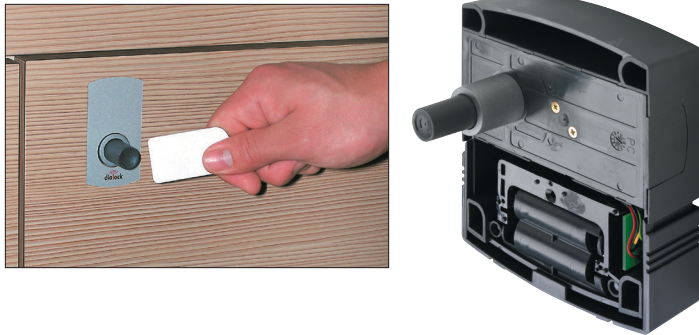


Inset Installation

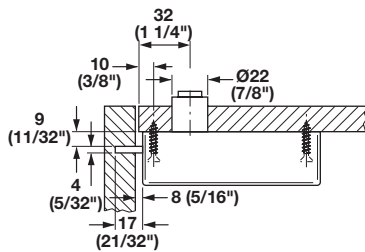

Overlay Installation

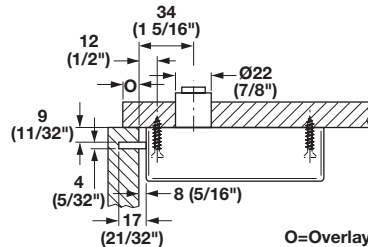

For door thickness: 13–19 mm (1/2"–3/4")
Minimum cabinet width: 140 mm (5 1/2")



Technical Data

Can be mounted on left hand or right hand door
Memorizes up to 228 user keys
Memorizes last 150 key uses
(Complete Programming feature only)
Requires (4) 1.5V/DC AA Premium Batteries

- Replacement after 10,000 cycles
- Under low power, locking is not possible
- Batteries accessible only with special tool

Includes locker label without number

Tag-it™

- For use on locker or casework doors
- Transmitter and receiver for exchange with Dialock® key
- Red/Green LED for visual indication of programming progress and key authorization (on interior box)
- Catch has 2 visible states:
 - Open – with push button extended
 - Locked – with push button retracted
- To lock and unlock – press the push button with an authorized key
- Optional
 - Wellness Function
 - Free choice of open lockers
 - Any key can lock then open any locker
 - Emergency Master Key
 - Requires Info Terminal
- Mounts to inside of door with 4 wood screws
- Utilizes Tag-it™ technology
- For use with Dialock® Tag-it™ keys

Material: Plastic

Color	Item No.
gray	231.90.013



10

Locker/Cabinet Label

- With numbers – special order, specify 4 digit number
- Trim and label locks push button

Material: Plastic

Color	Item No.
silver	231.81.000