


Wood Dowels (Fluted)

- Fluted dowels allow the glue to distribute evenly over the entire surface
- Suitable for non-glued applications in combination with mechanical fasteners
- Application:
 - Glued case connections
 - Non-glued connections in combination with mechanical fastener

Material: Kiln-dried hardwood

Metric				
A x B	Item No.	Packing	Bulk Item No.	Packing
5 x 30	267.83.030	1,000	267.83.030.BB	52,000
5 x 35	267.83.035	1,000	267.83.035.BB	46,000
5 x 40	267.83.040	1,000	267.83.040.BB	30,000
6 x 25	267.83.125	1,000	267.83.125.BB	44,000
6 x 30	267.83.130	1,000	267.83.130.BB	35,400
8 x 25	267.83.225	1,000	267.83.225.BB	23,000
8 x 30	267.83.230	1,000	267.83.230.BB	19,200
8 x 32	267.83.232	1,000	267.83.232.BB	17,800
8 x 35	267.83.235	1,000	267.83.235.BB	16,400
8 x 38	267.83.238	1,000	267.83.238.BB	15,000
8 x 40	267.83.240	1,000	267.83.240.BB	14,200
8 x 50	267.83.250	1,000	267.83.250.BB	12,000
10 x 30	267.83.330	1,000	267.83.330.BB	25,000

Inch				
A x B	Item No.	Packing	Bulk Item No.	Packing
1/4" x 1"	267.80.102	1,000	267.80.102.BB	38,700
1/4" x 1-1/4"	267.80.105	1,000	267.80.105.BB	29,600
5/16" x 1-1/4"	267.80.205	1,000	267.80.205.BB	17,800
5/16" x 1-1/2"	267.80.207	1,000	267.80.207.BB	15,000
3/8" x 1-1/2"	267.80.307	1,000	267.80.307.BB	20,000
3/8" x 2"	267.80.312	1,000	267.80.312.BB	13,000
1/2" x 3"	267.80.719	1,000	267.80.719.BB	5,000

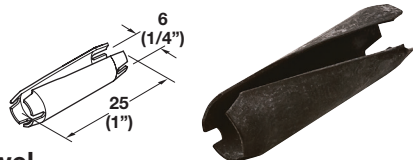

Compression Dowel


- Open on both ends
- For quick and easy attachment of trim parts
- No glue or clamping needed
- To aid as a clamping device while the glue on wooden dowels sets
- Can also be set in grooves for lineal adjustment

Material: Steel

Color	Item No.
black oxide	267.74.300

Note

The diameter of the compression dowels refers to the drilling diameter. Since the dowels are under tension, they are slightly bigger in diameter.

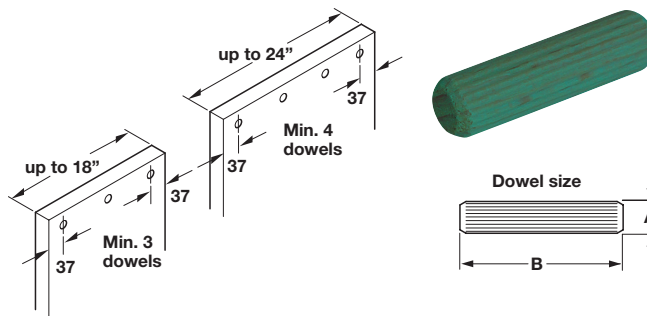

Pre-Glued Multi-Grooved (Fluted) Wooden Dowel

- 100% glue coverage creates superior holding strength
- Eliminates clean up time on your product during and after assembly


Material: Kiln-dried hardwood

Metric				
A x B	Item No.	Packing	Bulk Item No.	Packing
6 x 25	267.84.125	1,000	267.84.125.BB	44,000
6 x 30	267.84.130	1,000	267.84.130.BB	35,400
8 x 25	267.84.225	1,000	267.84.225.BB	23,000
8 x 30	267.84.230	1,000	267.84.230.BB	19,200
8 x 32	267.84.232	1,000	267.84.232.BB	17,800
8 x 35	267.84.235	1,000	267.84.235.BB	16,400
8 x 38	267.84.238	1,000	267.84.238.BB	15,000

Note

How to Use a Pre-glued Dowel Pin

- Simply replace your glue with water
- Fill approximately 1/3 of the hole with water and insert dowel
- A spray mist bottle can also be used by holding the nozzle next to the hole, and spraying 1 or 2 times before you insert the dowel

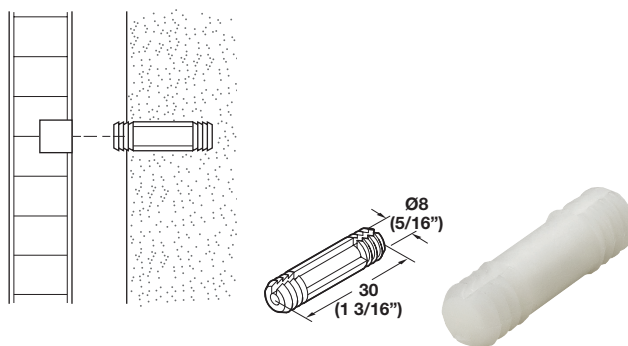

“EXACT” Connector

- For solid and detachable connections
- Made of high grade, high-impact plastic for invisible and corrosion proof connections
- The tooth-like grooves of the dowels guarantee a tight fit even without glue
- EXACT dowels save labor on ceiling, door and wall paneling as they can also be driven into brick and concrete

Material: Plastic

Color	Item No.
white	267.70.700

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate